


Cal. YM41A

CHRONOGRAPH

- 1/1 sec. chronograph

◆ Display

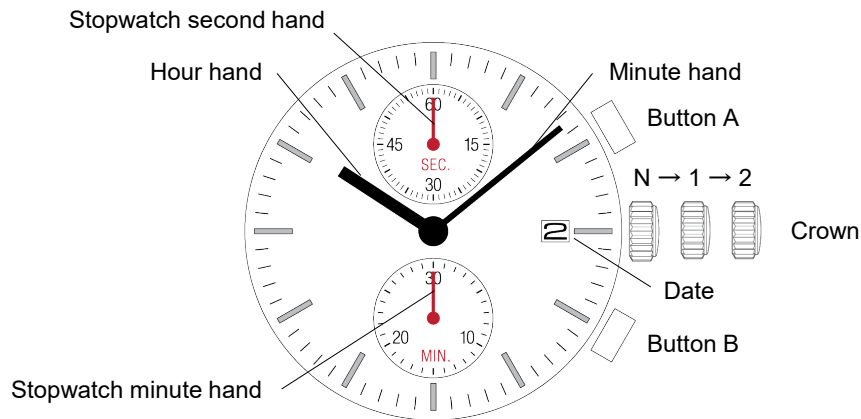

◆ Crown and button operation

	Crown position		
	N : normal	1 : 1st click	2 : 2nd click
Crown	Free	Turn clockwise for date change	Time setting
Button A	Stopwatch Start Stop Restart	Stopwatch Start Stop Restart	Stopwatch second hand position adjustment
Button B	Stopwatch Reset Split Split release	Stopwatch Reset Split Split release	Stopwatch minute hand position adjustment

◆ Stopwatch hand position adjustment

If the stopwatch hands are not in the "0" position, follow the procedures below to set them.

- (1) Pull the crown out to the 2nd click position.
 - When the stopwatch is measuring, if the crown is pulled out to the 2nd click position, it will be automatically reset.
- (2) Set the stopwatch second hand.
 - Press the button A repeatedly to set it to the "0" position.
- (3) Set the stopwatch minute hand.
 - Press the button B repeatedly to set it to the "0" position.
- (4) Push the crown back to the normal position.

Tips : When setting the hands, the hand moves quickly if the button is kept pressed.

◆ How to set time

- (1) Pull the crown out to the 2nd click position.
 - When the stopwatch is measuring, if the crown is pulled out to the 2nd click position, it will automatically reset the stopwatch hands to "0" position.
- (2) Turn the crown to set the hour and minute hands.

Take a.m./p.m. into consideration when setting the hour and minute hands to the desired time.

 - The hands be set to the time a few minutes ahead of the current time, taking into consideration the time required to adjust the stopwatch hands position if necessary.
 - When setting the minute hand, advance it 4 to 5 minutes ahead of the desired time and then turn it back to the exact time.
- (3) Push the crown back to the normal position.

◆ How to set date

- (1) Pull the crown out to the 1st click position.
- (2) Turn the crown to set the date.
 - Do not set the date between 9:00 p.m. and 1:00 a.m..
- (3) Push the crown back to the normal position.

Tips : When the date change during daytime, it happens when a.m./p.m. is wrongly set. Advance the hour hand by 12 hours.


◆ How to use stopwatch function

- The stopwatch can measure up to 29'59" in one-second increments.
- When the measurement reaches 30 minutes, the stopwatch automatically stops counting.


■ Standard measurement




■ Accumulated elapsed time measurement

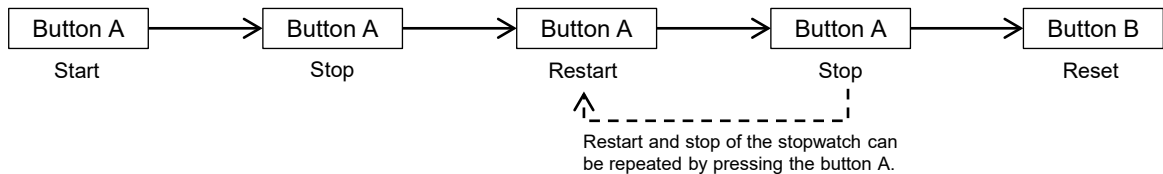

■ Split time measurement

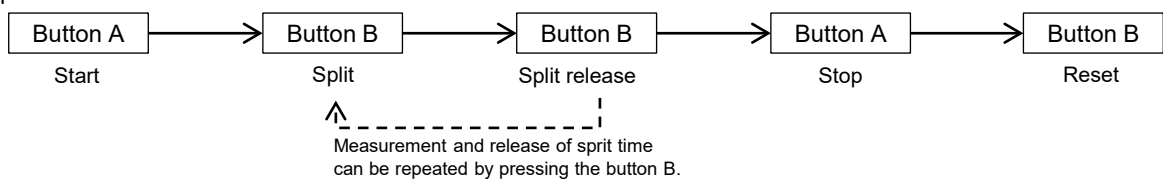

■ Measurement of two competitors



- The stopwatch second hand is capable of timing 30 minutes. (60 seconds x 30 times)
- The stopwatch minute hand is capable of timing 30 minutes.
- Before using the stopwatch, be sure to check that the crown is set at the normal position and that the stopwatch hands are reset to the "0" position.
 - If the stopwatch hands do not return to the "0" position when the stopwatch is reset to "0", follow the procedure in "Stopwatch hand position adjustment".